

ÖLÇÜ TEYİT FORMU

Index / İçindekiler



1	TR	ENDÜSTRİYEL KAPI YÜKSEK YATAKLAMA Ölçü Teyit Formu	1
2	EN	INDUSTRIAL DOOR HIGH LIFT Size Confirmation Form	2





ENDÜSTRİYEL KAPI ÖLÇÜ TEYİT FORMU (HL) YÜKSEK YATAKLAMALI

FİRMA İSMİ:

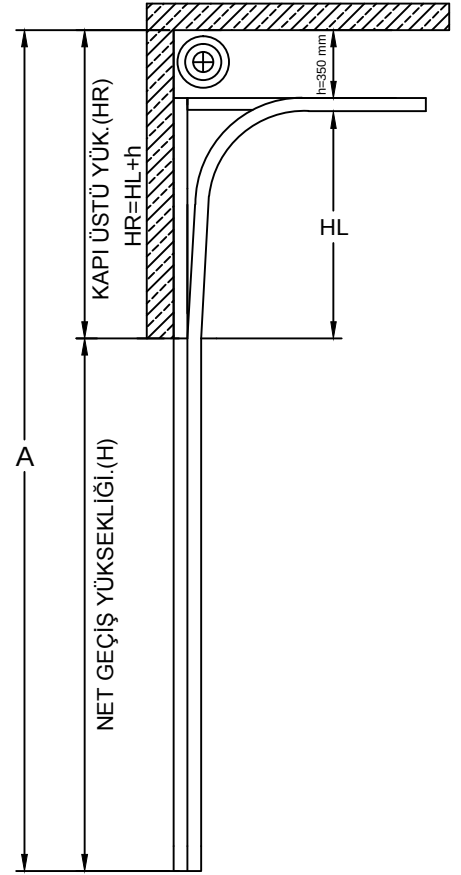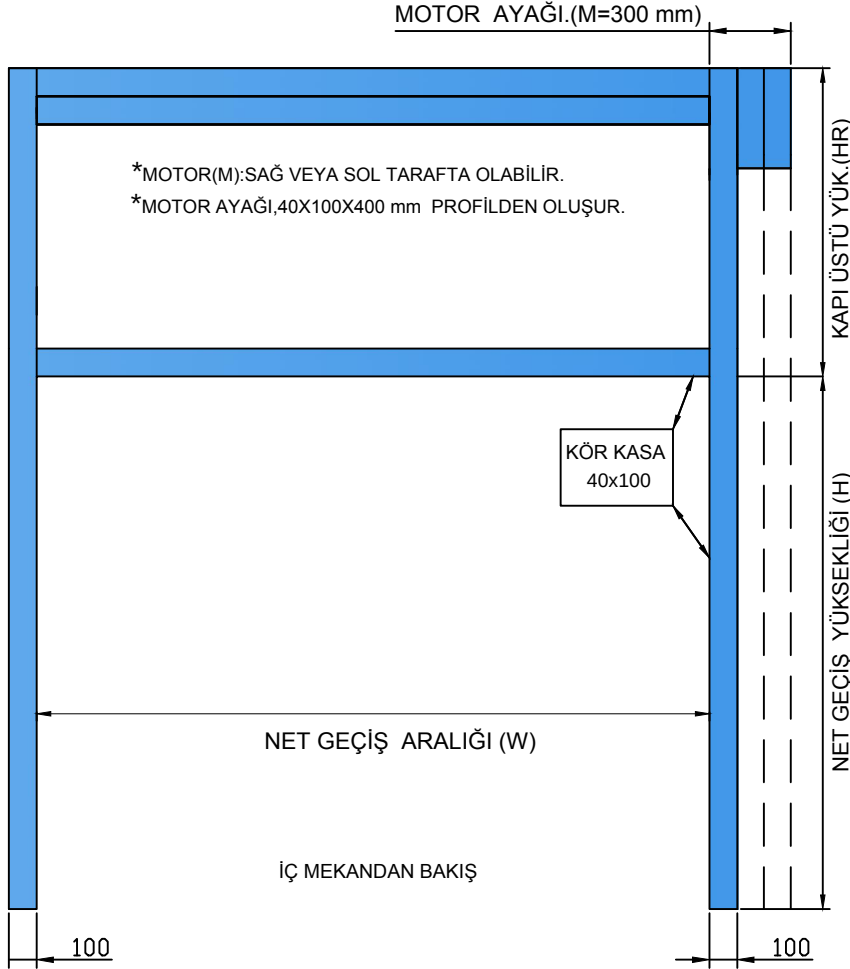

(KAPI YAN GÖRÜNÜŞ)

*SERVİS KAPISI	VAR	SAĞ	ORTA	SOL
*SERVİS KAPISI KONUMU İÇ MEKANDAN BAKILARAK BELİRTİLMELİDİR.				
PENCERE	END DİKDÖRTGEN	END OVAL	DAR DİKDÖRTGEN	
PENCERE KONUM				

PANEL TİPİ	ÇİZGİLİ	KASETLİ	DÜZ
PANEL RENGİ	DIŞ RAL	İÇ RAL	
KAPI ADEDİ			

KAŞE/İMZA

NET GEÇİŞ ARALIĞI(W)		NET GEÇİŞ YÜKSEKLİĞİ(H)		KAPI ÜSTÜ YÜKSEKLİĞİ(HR)	
				DÖNÜŞ YÜKSEKLİĞİ(HL)	
DiĞER NOTLAR:					



ÖLÇÜLER KÖR KASA İÇTEN İÇE ÖLÇÜLERİ OLMALI VE O ŞEKİLDE BELİRTİLMELİDİR.
KAPI DÖNÜŞ KISMINI VE YATAKLAMA ALANINI ENGELLEYECEK ,KİRİŞ,BORU,ELEKTİRİK TAVASI VB.HİÇ BİRŞEY BULUNMAMALIDIR.
İSTİSNALI DURUMLARDA TARAFİMİZA BİLDİRİLMESİ GEREKMEKTEDİR.YAY PAKETİ İÇİN (STD) STANDART YATAKLAMALI
KAPILARDA 400 MM ,(HL) YÜKSEK YATAKLAMALI KAPILARDA 350 mm, (GYT) GİYOTİN KAPILARDA 350 mm GEREKLİDİR.



INDUSTRIAL DOOR SIZE CONFIRMATION FORM (HL) HIGH LIFT

COMPANY NAME:

MOTOR SUPPORT.(M=300 mm)

*SUPPORT FOR MOTOR CAN BE AT RIGHT OR LEFT SIDE
AND MUST BE MINIMUM 300 mm

FRAMEWORK
40x100

NET OPENING WIDTH(W)

VIEW FROM INSIDE

100

100

HEADROOM.(HR)

NET OPENING HEIGHT(H)

HEADROOM.(HR)

NET OPENING HEIGHT(H)

HR=HL+h

HL

(SIDE VIEW)

*PASS DOOR	YES	RIGHT	MIDDLE	LEFT
*POSITION OF THE PASS DOOR MUST BE INDICATED AS VIEW FROM INSIDE				
WINDOW	RECTANGULAR WINDOW	OVAL WINDOW	NARROW WINDOW	
POSITION OF THE WINDOW				

TYPE OF THE PANEL	RIBBED	CASSETTE	STRAIGHT
COLOR OF THE PANEL	OUTER		INNER
NUMBER OF DOOR	RAL	RAL	

STAMP/SIGNATURE

NET OPENING WIDTH(W)		NET OPENING HEIGHT(H)		HEADROOM(HR)	
			HORIZONTAL TRACK HEIGHT (HL)		
NOTES:					



ALL DIMENSIONS MUST BE CLEAR AND NO OBSTACLE IS PERMITTED IN THE HEADROOM & SIDEROOMS. STD DOORS REQUIRE 400 mm, HL & VL REQUIRE 350 mm HEADROOM