



PN4 PNEUMATIC KIT



1. R-TEC PN4 PNEUMATIC KIT

r-tec PN4 safety kit with low pressure switch.


2. TECHNICAL SPECIFICATIONS

Contac Load	:	max.0.5A/250VAC
Switch Speed	:	max. 10/sec
Pressure Capacity	:	20 mbar
Working Capacity	:	Mekanik min. 50x10E6 switch
Electric	:	min. 50000 switch (0.1A/250VAC)
Operating Temperature:		-20C / +70C
Contac Material	:	Hard Silver
Operation Type	:	Switching without using electric current
Type of Operation	:	NO / NC
Working Environment:		Where there is no electricity (wet places and humid places)

3. OPERATING PROPERTIES

- Works with the pressure of the air trapped in the closed channel
- The duct is used with the wickets on its own, and there is also no air hose.
- NC (closed circuit) and NO (open circuit) operation.
- The r-tec PN 4 PNEUMATIC KIT has 2 dedicated Personnel Gate Switches. The personnel door switch is installed on the sectional door.

4. CABLE CONNECTION

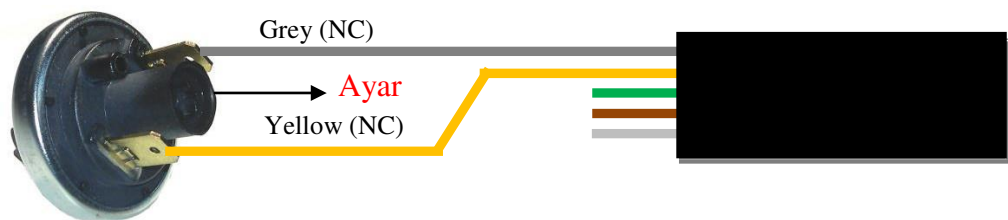

*** Two of the green, brown and white cables can be used for the personnel door stop switch.**

- In case of any malfunction, unscrew the product from its box and send it to R-TEC approved technical services. Otherwise, the product is out of warranty.